


COMMERCIAL REFRIGERATED DISPLAY CABINET



Bringing the concept of thinking globally, acting locally to life, we create smart, digitally connected, advanced engineering solutions.




Smart Lifestyle Australia is a team of bright, young, globally connected engineers and IT professionals, partnering with academia to solve the problems of our (and the rest of the world's) energy transition.



We harness global partnerships and extensive networks to move our energy networks from a centuries old polluting model to a renewable smart distributed and democratised system.



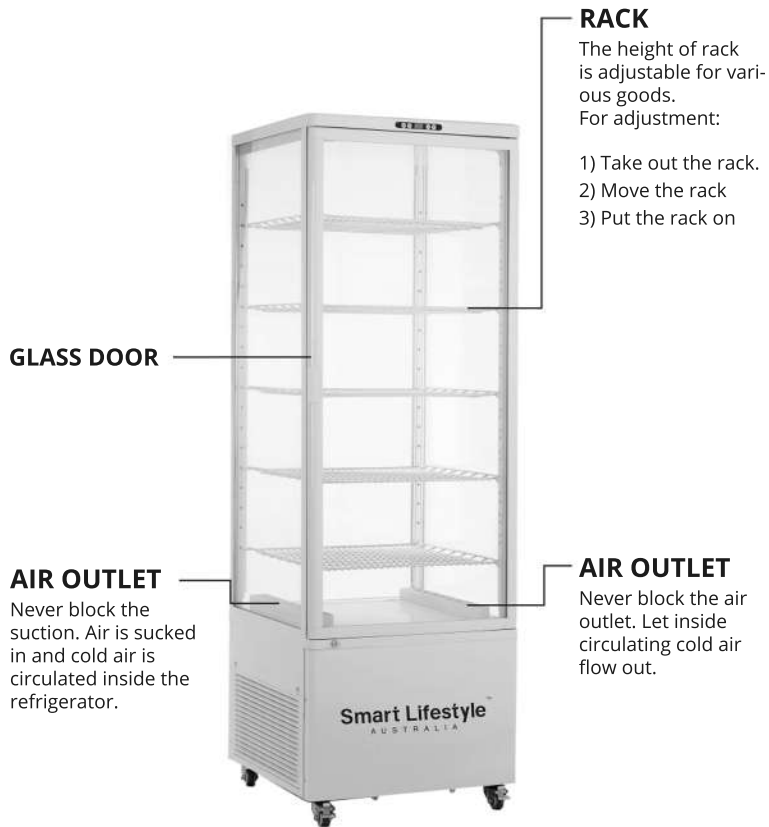

GLASS DOOR

AIR OUTLET
Never block the suction. Air is sucked in and cold air is circulated inside the refrigerator.

RACK
The height of rack is adjustable for various goods.
For adjustment:

- 1) Take out the rack.
- 2) Move the rack
- 3) Put the rack on


AIR OUTLET
Never block the air outlet. Let inside circulating cold air flow out.

1. Top brand fully enclosed compressor is used on the refrigerator. The refrigerant R290 is of an environmentally friendly again. It features a rational configuration of refrigeration system with blower forced air cooling. The temperature is quite even inside the refrigerator.

2. Double hollow transparent glasses are used on door and body. It features an artistic and elegant appearance, perfect perspective and east access.

3. It has a wide application in department store and house as well as the meeting room and sitting room.

Smart Lifestyle Australia
500 LTR COMMERCIAL RDC

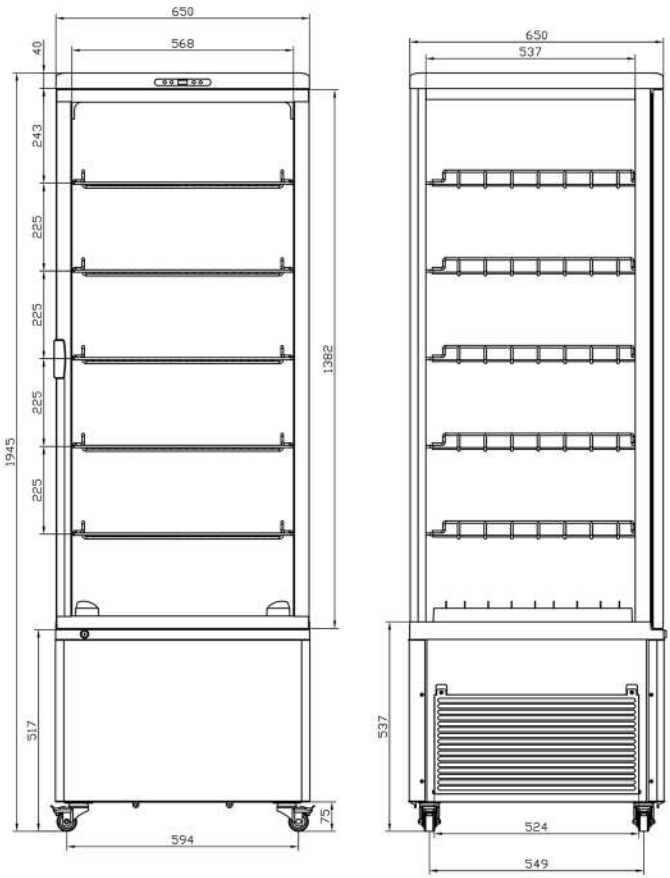

Product Specifications

| MODEL | 500 LTR COMMERCIAL RDC |
|------------------------|--------------------------------|
| Model | SLA-500 |
| Volume | 500L |
| Size LxWxH (mm) | 650*650*1945 |
| Pacakging size (mm) | 735X735X1980 |
| Pallet height(mm) | 120 |
| N.W. (kg) | 135 |
| G.W. (kg) | 144 |
| Pallet weight (kg) | 4.9 |
| Glass panel | 4 |
| Area of glass panel | 2.95m ² |
| EEI | 10.3 |
| Kwh/ day (TEC) | 3.703 |
| Loading 20'/40'/40HQ | 21/45/45 |
| Temperature °C | 0-12°C |
| Working temperature °C | 16-30°C |
| Cooling system | Ventilated |
| Volt. | 220~240V/50Hz |
| Thermostate | Digital |
| Refrigerant | R290 |
| Foam thickness (mm) | NA |
| Defrosting | Auto |
| Self-evaporation | Yes |
| Standard | GEMS 2020 |
| Cabinet Exterior | Glass/Plastic |
| Doors | 1 |
| Type of door | Glass |
| Glass layer | 2 |
| Material of door frame | PVC |
| Colour | White |
| Lockable | yes |
| LED light | 2 sides |
| Compressor location | Bottom |
| Shelves | PVC Coated |
| No. of Shelves | 5 |
| Wheels | 4pcs Castors + 2 stabilizer |
| Noise (db) | <55 |
| Specifications | Brilliant LED light at 2 sides |
| | Digital control and display |
| | Adjustable PVC coated shelves |
| | Front flat glass door |
| | Witch door lock |
| | 4 sides double glass |
| | 4 Castors with 2 brackes |
| | Ventilated cooling system |
| | Energy class of 10 star |
| | Automatci defrost |
| TEC | 3.703 |
| ESCs | 36** |

****Calculations are tentative**

Commercial Refrigerated
Display Cabinets Provided by

Smart LifestyleTM

A U S T R A L I A

- Ph: 1300 198 955 ■ ABN 54 652 113 561
- info@smartlifestyleaustralia.com.au
- www.smartlifestyleaustralia.com

Office Address

- Unit 1, 41 Anzac St, Greenacre, NSW 2190
- 16 Fastline Road Truganina VIC 3029